

I hereby certify that this correspondence is being deposited with the United States Postal Service, with sufficient postage, as first class mail in an envelope addressed to:

Mail Stop MISSING PARTS
Commissioner for Patents,
P.O. Box 1450
Alexandria, VA 22313-1450, on

12/1/04

(Date of Deposit)

Anthony P. Curtis, Ph.D., Reg. No. 46,193

Name of Applicant, Assignee or
Registered Representative

Signature

Our Case No. 12581-4134

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Hyung Ki Hong

Serial No.: 10/750,575

Filed: December 29, 2003

For: LIQUID CRYSTAL DISPLAY
DEVICE

Examiner: Not yet assigned

Group Art Unit No. 2871

PETITION UNDER 37 CFR 1.53(e)

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450


Dear Sir:

Applicant of the above-referenced application hereby petitions under 37 CFR 1.53(e) and requests that the Commissioner accord the filing date of the application as complete (including page 9) on December 29, 2003. Accompanying this petition, in accordance with the Notice of Omitted Items and 37 CFR 1.53(e), Applicants herein submit a copy of the Notice of Omitted Items, a copy of the application as filed, the express mail receipt, a copy of the PTO Stamped Postcard confirming receipt of 30 pages (including title page and page 9), of the application, an affidavit from Anthony P. Curtis, Ph.D., and the petition fee set forth in 37 CFR 1.17(h). The postcard is a date-stamped itemized postcard receipt that confirms that page 9 was

received by the USPTO. This petition is being timely filed within 2 months from the date of the Notice of Omitted Item(s).

Accordingly, Applicant respectfully requests that the USPTO grant the filing date of the application as complete (including page 9) as December 29, 2003. Applicant further requests that the petition fee be refunded when it is determined that page 9 was in fact received by the USPTO with the application papers deposited on filing.

Respectfully submitted,

A handwritten signature in black ink, appearing to read 'Anthony P. Curtis', is written over a horizontal line.

Anthony P. Curtis, Ph.D.
Registration No. 46,193
Agent for Applicant

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200



"Express Mail" mailing label number EV 327173250 US.

Date of Deposit: December 29, 2003

Our File No. 10125/4134
LGP Ref. No. F03-427US001



PATENT APPLICATION TRANSMITTAL LETTER

To the Commissioner for Patents:

Transmitted herewith for filing is the patent application of Hyung Ki Hong
for LIQUID CRYSTAL DISPLAY MODULE.

Enclosed are:

- ☒ 30 pages of application (including title page), 7 sheet(s) of [formal] drawings and the following Appendices: None
- ☒ Assignment transmittal letter and Assignment of the invention to : LG. PHILIPS LCD CO., LTD.
- ☒ Declaration Combined Power of Attorney
- ☐ Submission of Certified Copy of Priority Document and certified copy of Korean Application No.
- ☐ Information Disclosure Statement, PTO-1449, and reference A

Claims as Filed	Col. 1	Col. 2
For	No. Filed	No. Extra
Basic Fee		
Total Claims	26-20	6
Indep. Claims	2-3	0
Multiple Dependent Claims Present		

*If the difference in col. 1 is less than zero, enter "0" in col. 2.

Small Entity	
Rate	Fee
	\$ 385
x\$9=	\$
x\$42=	\$
+\$140=	\$
Total	\$

Other Than Small Entity	
Rate	Fee
	\$ 770
x\$18=	\$108
x\$86=	\$0
+\$290=	\$
Total	\$878

- ☐ Please charge my Deposit Account No. 23-1925 in the amount of \$ _____. A duplicate copy of this sheet is enclosed.
- ☒ Checks in the amount of \$878 to cover the filing fee and \$40 to cover recordal of assignment are enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
 - ☒ Any additional filing fees required under 37 CFR § 1.16.
 - ☒ Any patent application processing fees under 37 CFR §1.17.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
 - ☐ Any filing fees under 37 CFR § 1.16 for presentation of extra claims.
 - ☐ Any patent application processing fees under 37 CFR § 1.17.
 - ☐ The issue fee set in 37 CFR § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR § 1.311(b).

Date

12/29/03

Anthony P. Curtis, Ph.D.
BRINKS HOFER GILSON & LIONE
Registration No. 46,193
Customer No. 00757 - Brinks Hofer Gilson Lione



"Express Mail" mailing label number EV 327173250 US

Date of Deposit: December 29, 2003

Our Case No. 10125/4134
Client Ref. No. F03-427US001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR:


Hyung Ki Hong

TITLE:

LIQUID CRYSTAL DISPLAY
MODULE

AGENT:

Anthony P. Curtis, Ph.D.
Reg. No. 46,193
BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200



Liquid Crystal Display Module

[0001] This application claims the benefit of Korean Patent Application No. P2003-15679 filed on March 13, 2003, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to a liquid crystal display module, and more particularly to a liquid crystal display module that can be made lightweight with reduced light loss.

Description of the Related Art

[0003] Generally, a liquid crystal display (hereinafter, referred to as LCD) displays a desired picture on a screen by controlling the transmittance of the light supplied from a backlight unit by using a liquid crystal display panel including a plurality of liquid crystal cells arranged in a matrix and a plurality of control switches to switch video signals to be supplied to each of the liquid crystal cells.

[0004] FIG. 1 is a perspective view representing a known liquid crystal display module.

[0005] Referring to FIG. 1, the liquid crystal display module includes a lamp 22 to generate light, a lamp housing 4 where the lamp 22 is equipped, a light guide panel 2 to convert an incident light from the lamp 22 into a surface light, optical sheets 8, 10, 12 and 14 stuck to the light guide panel 2 to increase the efficiency of the light incident to a display panel, a reflective plate 6 stuck to the rear surface of the light guide panel 2 to reflect the light emitted through the rear surface of the light guide panel 2, and a liquid crystal display panel 20 to realize a picture in use of the light generated at the lamp 22.

[0006] The lamp 22 is mainly a cold cathode fluorescent lamp. And the light generated at the lamp 22 is incident to the light guide panel 2 through the incident surface that exists at the side of the light guide panel 2.

[0007] The lamp housing 4 is installed to have a reflective surface in the inner surface thereof in a manner of covering the lamp 22, so as to reflect the light from the lamp 22 to the incidence surface of the liquid guide panel 2.

[0008] The light guide panel 2 converts the incident light from the lamp 22 into the surface light. Such a light guide panel 2 has a sloped lower surface and a horizontal upper surface, which are perpendicular to each other. The lower surface of the light guide panel 2 has a reflective plate 6. The light guide panel 2 transmits the incident light from the lamp 22 towards the end opposing the end to which the lamp 22 is attached. The light guide panel 2 is made of polymethyl methacrylate (PMMA), which has a good transmissivity and has high degree of strength, so that it is not

easily changed or broken.

[0009] The light incident on the reflective plate 6 is reflected through the rear surface of the light guide panel 2 to the light guide panel 2, thereby reducing light loss.

[0010] If the light from the lamp 22 is incident to the light guide panel 2, it is reflected at the lower surface, which is sloped at a specific tilt angle so the light progresses evenly toward the outgoing surface. The light, which progresses to the lower surface and the side surface of the light guide panel 2, is reflected to the reflective plate 6 to progress toward the outgoing surface. The light emitted through the outgoing surface of the light guide panel 2 is diffused to the whole area by the diffusion sheet 8. On the other hand, the light incident to the liquid crystal display panel 20 has the highest light efficiency when it is perpendicular. For this, two prism sheets 10 and 12 are stacked in order to make the progress angle of the light emitted from the light guide panel 2, and the light is perpendicular to the liquid crystal display panel 2.

[0011] First and second prism sheets 10 and 12 are composed of a plurality of prism arrays with peaks and valleys. The two prism sheets 10, 12 concentrate the outgoing light from the diffusion sheet 8 in a direction perpendicular to the lower planar surface.

[0012] A protective film 14 is used to protect the surface of the second prism sheet 12, and diffuse the light to evenly distribute the light.

[0013] In this way, the light generated at the backlight unit is incident to the liquid crystal display panel 20.

[0014] The liquid crystal display panel 20 is formed between an upper polarizer 18 and a lower polarizer 16. It has liquid crystal cells arranged between upper and lower substrates 20A, 20B in an active matrix. And the liquid crystal display panel 20 has a thin film transistor installed at each of the liquid crystal cells to switch video signals. The refractive index of each liquid crystal cell is changed in accordance with the video signal, so a picture corresponding to the video signal is displayed. That is, the liquid crystal panel 20 displays a picture by selectively transmitting the light from the backlight unit by way of having liquid crystal driven by a voltage difference between a common electrode of the upper substrate 20A and the a pixel electrode of the lower substrate 20B.

[0015] The first and second prism sheets 10 and 12 and a diffusion sheet 8 among the optical sheets of the liquid crystal display module include a function layer where the optical sheet is actually functional (i.e. provides the functional features), and a support layer which supports the function layer. For the diffusion sheet 8, a function layer of several tens μm and below which is a dispersion layer is located on a support layer of 100-220 μm . For the first and second prism sheet 10 and 12, a prism pattern which is a function layer of several tens μm is located on a support layer of up to 100 μm . There is a problem in that the overall thickness of the liquid crystal display module gets thicker due to the supporting layer. In order to solve such a problem, in the known liquid crystal display module, lightness and high brightness have been studied, especially the

lightness of backlight unit has been actively studied.

[0016] For example, a liquid crystal display module has been suggested in which the light guide panel and the optical sheets are integrated as shown in FIG. 2, and a liquid crystal display module where the light guide panel and the optical sheets are removed as shown in FIG. 3.

[0017] The liquid crystal display module shown in FIG. 2 forms optical sheets 30 on the light guide panel 2, thereby reducing the thickness of the backlight unit since it is not necessary to form a support layer for the optical sheets 30. However, there is a problem in that light loss occurs when the outgoing light from the light guide panel 2 repeatedly passes through the optical sheets 30 and the polarizer 16 as shown in FIG. 2. This is because a total reflection condition established by a gap between the light guide panel 2 and the optical sheets 30 can not be established between the light guide panel 2 and the other optical sheets 30 stuck thereto.

[0018] The liquid crystal display module shown in FIG. 3 may reduce the thickness of the backlight unit by constituting a light guide panel with the lower substrate of the liquid crystal display panel without any separate light guide panel. However, in case that the light is incident from the lamp 22 that is located at one side of the lower substrate 20B, there is a problem in that light loss occurs when the light generated at the lamp 22 repeatedly passes through the optical sheets 26, the polarizer 16, lower patterns (thin film transistor, signal line and pixel electrode) formed on the polarizer 16 and upper patterns (common electrode, color filter and black matrix) formed on the upper substrate 20A.

SUMMARY OF THE INVENTION

[0019] Accordingly, embodiments of the present invention provide a liquid crystal display module that can be made lightweight with reduced light loss.

[0020] In order to achieve these and other advantages of the invention, a liquid crystal display module according to an aspect of the present invention includes a light source to generate light and a light guide panel through which the light from the light source propagates. The light guide panel has a first refractive index. A low refractive index layer is disposed on the light guide panel and has a second refractive index which is lower than the first refractive index. A transmissive liquid crystal display panel is disposed on an upper portion of the lower refractive layer.

[0021] The light in the light guide panel may be totally reflected at a border between the light guide panel and the low refractive index layer when the light in the light guide panel impinges on the border at an angle of: $90^\circ - \sin^{-1}(1/\text{the first refractive index}) > \sin^{-1}(\text{the second refractive index}/\text{the first refractive index})$.

[0022] The first and second refractive indices may be 1.7 and 1.35, respectively.

[0023] The liquid crystal display module may further comprise optical sheets disposed on the low refractive index layer and a polarizer disposed on the optical sheets to polarize light from

the optical sheets.

[0024] The liquid crystal display panel may include a lower substrate disposed on the polarizer and an upper substrate facing the lower substrate with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal or an upper substrate facing the polarizer with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal and no substrate disposed between the liquid crystal and the light guide panel.

[0025] The liquid crystal display module may further comprise a condenser disposed between the light source and the light guide panel.

[0026] The light in the light guide panel then may be totally reflected at a border between the light guide panel and the low refractive index layer when the light in the light guide panel impinges on the border at an angle of: $90^\circ - \text{condensed degree by the condenser} > \sin^{-1}(\text{the second refractive index}/\text{the first refractive index})$.

[0027] The first and second refractive indices may be 1.5 and 1.35, respectively.

[0028] The low refractive index layer may be disposed on a first surface of the light guide panel and a second surface of the light guide panel that opposes the first surface may have a plurality of grooves to reflect light impinging on the grooves towards the transmissive liquid crystal display panel.

[0029] The liquid crystal display module may further comprise a reflective plate disposed below the light guide panel, the reflective plate reflecting light escaping from the light guide panel and traveling away from the low refractive index layer back towards the light guide panel and the low refractive index layer.

[0030] A liquid crystal display module of another aspect comprises a light source to generate light, a light guide panel through which the light from the light source propagates, means for reflecting light in the light guide panel that impinges on a surface of the light guide panel at at least a critical angle and transmitting light in the light guide panel that impinges on the surface at less than the critical angle, the critical angle measured from a plane perpendicular to that formed by the surface, and a transmissive liquid crystal display panel disposed on the reflecting means.

[0031] The critical angle may be defined by: $90^\circ - \sin^{-1}(1/a \text{ first refractive index of the light guide panel}) > \sin^{-1}(a \text{ refractive index of the reflecting means/the refractive index of the light guide panel})$.

[0032] The reflecting means may be disposed directly on the light guide panel.

[0033] The liquid crystal display module may further comprise optical sheets disposed on the reflecting means and a polarizer disposed on the optical sheets to polarize light from the optical sheets.

[0034] The transmissive liquid crystal display panel may include a lower substrate disposed on the polarizer and an upper substrate facing the lower substrate with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal or an upper substrate facing the polarizer with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal and no substrate disposed between the liquid crystal and the light guide panel.

[0035] The liquid crystal display module may further comprise a light source housing reflecting the light generated by the light source towards the light guide plate and a condenser disposed between the light source and the light guide panel, the condenser condensing the light generated by the light source and the light reflected by the light source housing into a smaller range of angles emitted into the light guide panel.

[0036] The critical angle may be defined by: $90^\circ - \text{condensed degree by the condenser} > \sin^{-1}(\text{a refractive index of the reflecting means} / \text{a refractive index of the light guide panel})$.

BRIEF DESCRIPTION OF THE DRAWINGS

[0037] These and other advantages of the invention will be apparent from the following detailed description of the embodiments of the present invention with reference to the accompanying drawings, in which:

[0038] FIG. 1 is a perspective view representing a known liquid

crystal display module;

[0039] FIG. 2 is a sectional view representing a known liquid crystal display module which is integrated with a light guide panel, optical sheets and a polarizer.

[0040] FIG. 3 is sectional view representing a known liquid crystal display module without a light guide panel.

[0041] FIG. 4 is a sectional view representing a liquid crystal display module according to a first embodiment of the present invention;

[0042] FIG. 5 is a sectional view representing a liquid crystal display module according to a second embodiment of the present invention;

[0043] FIG. 6 is a sectional view representing a liquid crystal display module according to a third embodiment of the present invention; and

[0044] FIG. 7 is a sectional view representing a liquid crystal display module according to a fourth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0045] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are

illustrated in the accompanying drawings.

[0046] With reference to FIGs. 4 to 7, embodiments of the present invention will be explained as follows.

[0047] FIG. 4 is a sectional view representing a liquid crystal display module according to a first embodiment of the present invention.

[0048] Referring to FIG. 4, a liquid crystal display module according to a first embodiment of the present invention includes a backlight unit BL and a liquid crystal display panel LP located on the backlight unit BL.

[0049] The backlight unit BL includes a lamp 72 generating light, a lamp housing 54 equipped with the lamp 72, a light guide panel 52 to convert the light being incident from the lamp 72 into a surface light, a low refractive index layer 50 disposed on an upper surface of the light guide panel 52, optical sheets 60 disposed on the low refractive index layer 50 in order to increase the efficiency of the light incident on the liquid crystal display panel LP, and a reflective plate 56 disposed on a lower surface of the light guide panel 52 to reflect the light emitted to the lower surface of the light guide panel 52 to a display panel.

[0050] The low refractive index layer 50, the optical sheets 60, a lower polarizer 66 and the light guide panel 52 of the backlight unit BL are integrated by use of an adhesive (not shown)

[0051] The lamp 72 is mainly a cold cathode fluorescent lamp.

And the light generated at the lamp 72 is incident to the light guide panel 52 through the incident surface that exists at the side of the light guide panel 52.

[0052] The lamp housing 54 is installed to have a reflective surface in the inner surface thereof to cover the lamp 72, so as to reflect the light from the lamp 72 to the incidence surface of the liquid guide panel 52.

[0053] The light guide panel 52 converts the incident light from the lamp 72 into surface light which essentially reaches the end of the light guide panel 52 located opposite the lamp 72. Such a light guide panel 52 has an incidence surface and outgoing surface perpendicular to each other. A reflective plate 56 is installed to face the lower surface of the light guide panel 52. The light guide panel 52 is made of a material having a relatively high refractive index, which is a first refractive index n_1 . On the other hand, the light guide panel 52 has a sloped lower surface and a horizontal upper surface to increase the efficiency of light emitted. At least one of groove and protrusion patterns are formed on at least one of the lower surface and the upper surface.

[0054] The low refractive index layer 50 is disposed on the light guide panel 52. The low refractive index layer 50 is formed from a material that has a relatively lower refractive index than the light guide panel 52, i.e., a second refractive index n_2 that is lower than the first refractive index n_1 . The low refractive index layer 50 causes total reflection of the light incident on the border area with the light guide panel 52 so as to propagate the light throughout the light guide panel 52.

[0055] The reflective plate 56 reflects the light incident to itself through the lower surface of the light guide panel 52 again toward the light guide panel 52, thereby reducing light loss. If the light from the lamp 72 is incident to the light guide panel 52, it is reflected at the specific tilt angle that the lower surface is sloped to evenly progress toward the upper surface. The light that progresses to the lower surface and side surface of the light guide panel 52 is reflected in the reflective plate 56 to progress toward the upper surface.

[0056] The optical sheets 60 include the diffusion sheet, first and second prism sheet and a protective film which are sequentially located on the low refractive index layer 50.

[0057] The diffusion sheet diffuses the light emitted through the light guide panel 52 and the low refractive index layer 50 to the entire area. The first and second prism sheets are composed of a plurality of prism stripes with peaks and valleys. The two prism sheets concentrate the outgoing light from the diffusion sheet in a direction perpendicular to the lower, planar surface to increase the light efficiency. For this, the two prism sheets are stacked in order to make the progress angle of the light emitted from the light guide panel 52, and the light is perpendicular to the liquid crystal display panel 52. The protective film is used to protect the surface of the second prism sheet, and diffuse the light to evenly distribute the light.

[0058] The lower polarizer 66 polarizes the light diffused by the protective film, and the upper polarizer 68 polarizes the light

beam passing through the liquid crystal display panel LP.

[0059] In this way, the light generated at the integrated backlight unit BL is incident to the liquid crystal display panel LP through the lower polarizer 66.

[0060] The liquid crystal display panel LP includes an upper substrate 62 and the lower substrate 70, which are facing each other with liquid crystal 64 therebetween. A black matrix, a color filter and a common electrode (not shown) are formed on the upper substrate 62. And, a thin film transistor and a pixel electrode (not shown) are formed on the lower substrate 70. The liquid crystal display panel LP has its liquid crystal 42 driven by the voltage difference between a common electrode of the upper substrate 62 and the pixel electrode of the lower substrate 70 so as to selectively reflect the light from the integrated backlight unit BL, thereby displaying the picture.

[0061] On the other hand, in order to totally reflect the light incident to the low refractive index layer 50 of the backlight unit BL according to the first embodiment of the present invention, Formula 1 should be satisfied. In Formula 1, n_1 represents a high refractive index and n_2 does a low refractive index.

[Formula 1]

$$90^\circ - \sin^{-1}(1/n_1) > \sin^{-1}(n_2/n_1)$$

[0062] For example, when the first refractive index (n_1) of the light guide panel 52 is 1.7 and the second refractive index (n_2) of the low refractive index layer 50 is 1.35, 53° is the critical

angle that satisfies the total reflection condition at the border area between the light guide panel 52 and the low refractive index layer 50. That is, if the light emitted from the light guide panel 52 and incident to the low refractive index layer 50 is located and its critical angle is in a range of $54\sim 90^\circ$ in relation to the horizontal direction, the entirety of the light is totally reflected at the border area between the light guide panel 52 and the low refractive layer 50.

[0063] In this way, if the liquid crystal display module according to the first embodiment of the present invention satisfies Formula 1, the part of the incident light from the light guide panel is totally reflected at the low refractive index layer. Accordingly, the liquid crystal display module according to the first embodiment of the present invention can reduce light loss even though it has optical sheets formed on top of the low refractive index layer. Further, since the support layer of the optical sheets is not present, the liquid crystal display module can be reduced in weight and thickness.

[0064] FIG. 5 is a sectional view representing a liquid crystal display module according to a second embodiment of the present invention.

[0065] Referring to FIG. 5, the liquid crystal display module according to the second embodiment of the present invention, when compared with the liquid crystal display module shown in FIG. 4, has the lower substrate of the liquid crystal removed and has the same components except that a plurality of optical sheets, a polarizer and a plurality of electrodes are formed on the light guide panel.

[0066] The light guide panel 52 is made of a material which has a relatively high refractive index, i.e. the first refractive index n_1 . The low refractive index layer 50 is made of a material which has a lower refractive index (n_2) than the light guide panel 52. The low refractive index layer 50 is disposed on the light guide panel 52. This low refractive index layer 50 causes the light to be totally reflected on the border area between the light guide panel 52 and the low refractive index layer 50 so as to propagate the light throughout the light guide panel 52.

[0067] In order to totally reflect the light incident to the low refractive index layer 50 of the front light unit FL according to the second embodiment of the present invention, Formula 2 should be satisfied.

[Formula 2]

$$90^\circ - \sin^{-1}(1/n_1) > \sin^{-1}(n_2/n_1)$$

[0068] For example, when the first refractive index (n_1) of the light guide panel 52 is 1.7 and the second refractive index (n_2) of the low refractive index layer 50 is 1.35, 53° is the critical angle that satisfies the total reflection condition at the border area between the light guide panel 52 and the low refractive index layer 50. That is, if the incidence angle of the light emitted from the light guide panel 52 and incident to the low refractive index layer 50 is in a range of 54° ~ 90° , which is higher than the critical angle, in relation to the horizontal direction, the entirety of the light is totally reflected at the border area between the light guide panel 52 and the low refractive layer 50.

[0069] Optical sheets 60, a lower polarizer 66 and lower patterns 82 are formed on the low refractive index layer 50. The optical sheets 60 include a diffusion sheet, first and second prism sheets and a protective film. The lower polarizer 66 polarizes the light emitted from the optical sheets. The lower patterns 82 include gate lines, data lines, thin film transistors and pixel electrodes located on the lower polarizer 66. The light guide panel 52 integrated with the lower polarizer 66 where the lower patterns 82 are formed are formed to face the upper substrate 62 where a black matrix, a color filter and a common electrode are formed with liquid crystal 64 therebetween.

[0070] In this way, the liquid crystal display device according to the second embodiment of the present invention, if Formula 2 is satisfied, has the light incident to the light guide panel without light loss and emitted toward the upper substrate of the liquid crystal display panel throughout the light guide panel. Further, the liquid crystal display according to the second embodiment of the present invention has the lower patterns formed on the lower polarizer integrated with the light guide panel instead of the lower substrate where the lower patterns are normally formed. Accordingly, the lower substrate can be reduced in weight or thickness, thereby enabling it to be made light.

[0071] FIG. 6 is a sectional view representing a liquid crystal display module according to a third embodiment of the present invention.

[0072] Referring to FIG. 6, the liquid crystal display module

according to the third embodiment of the present invention, when compared with the liquid crystal display module shown in FIG. 4, has the same components except that a condensing device (condenser) is included in the incidence part of the light guide panel.

[0073] The condensing device 80 is formed of a plurality of prism patterns between the lamp 72 and the light guide panel 52 so as to reduce the light loss generated through an opening between the lamp 72 and the light guide panel 52. That is, the condensing device 80 condenses the light generated from the lamp 72 and the light reflected by the lamp housing 54. The condensed light is incident to the light guide panel 52 to be able to reduce the gap between the first refractive index (n_1) of the light guide panel 52 and the second refractive index (n_2) of the low refractive index layer 50. Such a condensing device 80 has high degree of strength, so it is not easily changed or broken and is made of acryl resin, which has a good transitivity. For example, the condensing device 80 is made of polymethyl methacrylate (PMMA). In case that the condensing device 80 is used, the light incident to the light guide panel 52 can be totally reflected when Formula 3 is satisfied.

[Formula 3]

$$90^\circ - \text{condensed degree by condensing device} > \sin^{-1}(n_2/n_1)$$

[0074] For example, when the first refractive index (n_1) is 1.5 and the second refractive index (n_2) is 1.35, the light incident to the light guide panel 52 located in a range of $64\sim 90^\circ$ in relation to the vertical direction is totally reflected at the border area between the light guide panel 52 and the low refractive layer 50. In this case, the condensing device 80 should condense light at

about 26 degrees and below in a horizontal direction in relation to the angle of light incident to the light guide panel 52.

[0075] In this way, the liquid crystal display module according to the third embodiment of the present invention forms the low refractive index layer with low refractive index on the light guide panel with high refractive index. This causes the light incident on the light guide panel to be emitted toward the upper substrate and at the same time to be totally reflected and propagate to other areas of the light guide panel. Further, the optical sheets can be disposed on the light guide panel with the low refractive index layer therebetween, thus the thickness of the liquid crystal display module can be reduced. Further, the angle distribution of the light incident to the light guide panel is controlled by having the condensing device, thus it is possible to reduce the refractive index difference between the light guide panel of high refractive index and the low refractive index layer of low refractive index.

[0076] FIG. 7 is a sectional view representing a liquid crystal display module according to a fourth embodiment of the present invention.

[0077] Referring to FIG. 7, the liquid crystal display module according to the fourth embodiment of the present invention, when compared with the liquid crystal display module shown in FIG. 6, has the same components except that a plurality of optical sheets, a polarizer and a plurality of electrodes are formed on the light guide panel not in the lower substrate.

[0078] In order to make the light totally reflected on the border

area between the low refractive index layer 50 of the second refractive index (n2) and the light guide panel 52 of the first refractive index (n1) of the liquid crystal display module according to the fourth embodiment of the present invention, Formula 4 should be satisfied.

[Formula 4]

$$90^\circ - \text{condensed degree by condensing device} > \sin^{-1}(n2/n1)$$

[0079] For example, when the first refractive index (n1) is 1.5 and the second refractive index (n2) is 1.35, the light incident to the light guide panel 52 in a range of 64~90° in relation to the vertical direction is totally reflected at the border area between the light guide panel 52 and the low refractive layer 50. In this case, the condensing device 52 should condense light at about 26 degrees and below in a horizontal direction in relation to the angle of light incident to the light guide panel 52.

[0080] Optical sheets 60, a lower polarizer 66 and lower patterns 82 are formed on the low refractive index layer 50. The optical sheets 60 include a diffusion sheet, first and second prism sheets and a protective film. The lower polarizer 66 polarizes the light going out from the optical sheets 60. The lower patterns 82 include gate lines, data lines, thin film transistors and pixel electrodes located on the lower polarizer 66. The light guide panel 52 integrated with the lower polarizer 66 where the lower patterns 82 are formed are formed to face the upper substrate 62 where a black matrix, a color filter and a common electrode are formed with liquid crystal 64 therebetween.

[0081] In this way, the liquid crystal display module according to the forth embodiment of the present invention forms the low refractive index layer with low refractive index on the light guide panel with high refractive index, thereby causing the light incident on the light guide panel to be emitted toward the upper substrate and at the same time to be totally reflected and propagate to other areas of the light guide panel. Further, the liquid crystal display device according to the fourth embodiment of the present invention forms the lower patterns in the lower polarizer which is integrated with the light guide panel instead of the lower substrate where the lower patterns are formed. Accordingly, the lower substrate can be reduced in weight and thickness, thereby making it light. In addition, the liquid crystal display module according to the fourth embodiment of the present invention includes the condensing device to control the angle distribution of the light incident to the light guide panel, thereby reducing the refractive index difference between the light guide panel of high refractive index and the low refractive index layer of low refractive index.

[0082] As described above, the liquid crystal display module according to the present invention forms the low refractive index layer with low refractive index on the light guide panel with high refractive index, thereby causing the light incident to the light guide panel to be emitted toward the upper substrate and at the same time to be reflected and propagate to other areas of the light guide panel without light loss. Further, the liquid crystal display module according to the present invention can remove at least any one of the support layer of the optical sheets or the lower substrate of the liquid crystal display panel so as to reduce it in weight and thickness, thereby enabling the structure to be made light.

Further, the liquid crystal display module according to the present invention has the condensing device to control the angle distribution of the light incident to the light guide panel, thereby making it possible to reduce the refractive index difference between the light guide panel of high refractive index and the low refractive index layer of low refractive index.

[0083] Although the present invention has been explained by the embodiments shown in the drawings described above, it should be understood to the ordinary skilled person in the art that the invention is not limited to the embodiments, but rather that various changes or modifications thereof are possible without departing from the spirit of the invention. Accordingly, the scope of the invention shall be determined only by the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display module, comprising:
 - a light source to generate light;
 - a light guide panel through which the light from the light source propagates, the light guide panel having a first refractive index;
 - a low refractive index layer disposed on the light guide panel, the low refractive index layer having a second refractive index which is lower than the first refractive index; and
 - a transmissive liquid crystal display panel disposed on an upper portion of the lower refractive layer.
2. The liquid crystal display module according to claim 1, wherein the light in the light guide panel is totally reflected at a border between the light guide panel and the low refractive index layer when the light in the light guide panel impinges on the border at an angle of: $90^\circ - \sin^{-1}(1/\text{the first refractive index}) > \sin^{-1}(\text{the second refractive index}/\text{the first refractive index})$.
3. The liquid crystal display module according to claim 1, wherein the first refractive index is 1.7 and the second refractive index is 1.35.
4. The liquid crystal display module according to claim 1, further comprising:
 - optical sheets disposed on the low refractive index layer;
 - and
 - a polarizer disposed on the optical sheets to polarize light from the optical sheets.

5. The liquid crystal display module according to claim 4, wherein the transmissive liquid crystal display panel includes:

a lower substrate disposed on the polarizer; and

an upper substrate facing the lower substrate with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal.

6. The liquid crystal display module according to claim 4, wherein the transmissive liquid crystal display panel includes an upper substrate facing the polarizer with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal, and no substrate is disposed between the liquid crystal and the light guide panel.

7. The liquid crystal display module according to claim 1, further comprising:

a condenser disposed between the light source and the light guide panel.

8. The liquid crystal display module according to claim 7, wherein the light in the light guide panel is totally reflected at a border between the light guide panel and the low refractive index layer when the light in the light guide panel impinges on the border at an angle of: $90^\circ - \sin^{-1}(\text{the second refractive index}/\text{the first refractive index})$.

9. The liquid crystal display module according to claim 7, wherein the first refractive index is 1.5 and the second refractive index is 1.35.

10. The liquid crystal display module according to claim 7, further comprising:

optical sheets disposed on the low refractive index layer;
and

a polarizer disposed on the optical sheets to polarize light from the optical sheets.

11. The liquid crystal display module according to claim 10, wherein the transmissive liquid crystal display panel includes:

a lower substrate disposed on the polarizer; and

an upper substrate facing the lower substrate with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal.

12. The liquid crystal display module according to claim 10, wherein the transmissive liquid crystal display panel includes an upper substrate facing the polarizer with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal, and no substrate is disposed between the liquid crystal and the light guide panel.

13. The liquid crystal display module according to claim 1, wherein the low refractive index layer is disposed on a first surface of the light guide panel, and a second surface of the light guide panel that opposes the first surface has a plurality of grooves to reflect light impinging on the grooves towards the transmissive liquid crystal display panel.

14. The liquid crystal display module according to claim

1, further comprising a reflective plate disposed below the light guide panel, the reflective plate reflecting light escaping from the light guide panel and traveling away from the low refractive index layer back towards the light guide panel and the low refractive index layer.

15. A liquid crystal display module, comprising:
a light source to generate light;
a light guide panel through which the light from the light source propagates;

means for reflecting light in the light guide panel that impinges on a surface of the light guide panel at at least a critical angle and transmitting light in the light guide panel that impinges on the surface at less than the critical angle, the critical angle measured from a plane perpendicular to that formed by the surface;
and

a transmissive liquid crystal display panel disposed on the reflecting means.

16. The liquid crystal display module according to claim 15, wherein the critical angle is defined by: $90^\circ - \sin^{-1}(1/a \text{ first refractive index of the light guide panel}) > \sin^{-1}(a \text{ refractive index of the reflecting means/the refractive index of the light guide panel})$.

17. The liquid crystal display module according to claim 16, wherein the reflecting means is disposed directly on the light guide panel.

18. The liquid crystal display module according to claim

15, further comprising:

optical sheets disposed on the reflecting means; and
a polarizer disposed on the optical sheets to polarize light
from the optical sheets.

19. The liquid crystal display module according to claim
18, wherein the transmissive liquid crystal display panel includes:
a lower substrate disposed on the polarizer; and
an upper substrate facing the lower substrate with liquid
crystal therebetween to selectively transmit the light through the
liquid crystal by driving the liquid crystal.

20. The liquid crystal display module according to claim
18, wherein the transmissive liquid crystal display panel includes
an upper substrate facing the polarizer with liquid crystal
therebetween to selectively transmit the light through the liquid
crystal by driving the liquid crystal, and no substrate is disposed
between the liquid crystal and the light guide panel.

21. The liquid crystal display module according to claim
20, wherein lower patterns are formed directly on the polarizer,
the liquid crystal disposed between the lower patterns and the lower
patterns.

22. The liquid crystal display module according to claim
15, further comprising:

a light source housing reflecting the light generated by the
light source towards the light guide plate; and

a condenser disposed between the light source and the light
guide panel, the condenser condensing the light generated by the

light source and the light reflected by the light source housing into a smaller range of angles emitted into the light guide panel.

23. The liquid crystal display module according to claim 22, wherein the critical angle is defined by: $90^\circ - \text{condensed degree by the condenser} > \sin^{-1}(\text{a refractive index of the reflecting means/a refractive index of the light guide panel})$.

24. The liquid crystal display module according to claim 15, further comprising:

optical sheets disposed on the reflecting means; and
a polarizer disposed on the optical sheets to polarize light from the optical sheets.

25. The liquid crystal display module according to claim 24, wherein the transmissive liquid crystal display panel includes:

a lower substrate disposed on the polarizer; and
an upper substrate facing the lower substrate with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal.

26. The liquid crystal display module according to claim 24, wherein the transmissive liquid crystal display panel includes an upper substrate facing the polarizer with liquid crystal therebetween to selectively transmit the light through the liquid crystal by driving the liquid crystal, and no substrate is disposed between the liquid crystal and the light guide panel.

Abstract

A liquid crystal display module includes a light source that generates light. A light guide panel has a first refractive index. Light from the light source propagates through the light guide panel. A low refractive index layer is disposed on the light guide panel and has a second refractive index which is lower than that of the light guide panel. A transmissive liquid crystal display panel is disposed on the upper part of the lower refractive layer.




FIG. 1
RELATED ART

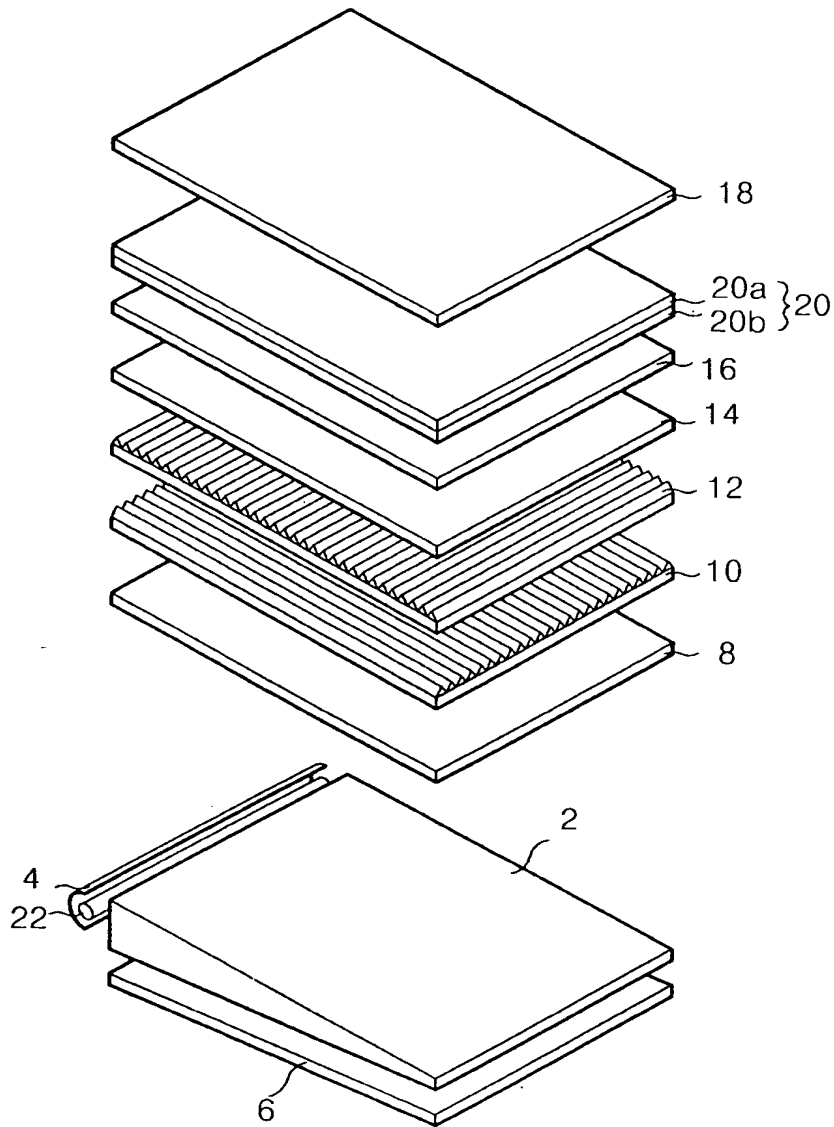


FIG. 2
RELATED ART



FIG.3
RELATED ART

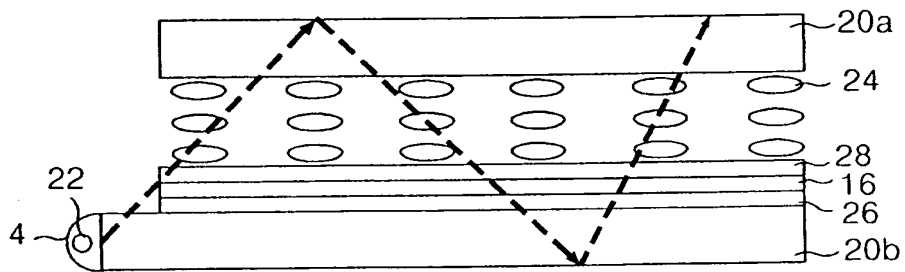


FIG. 4

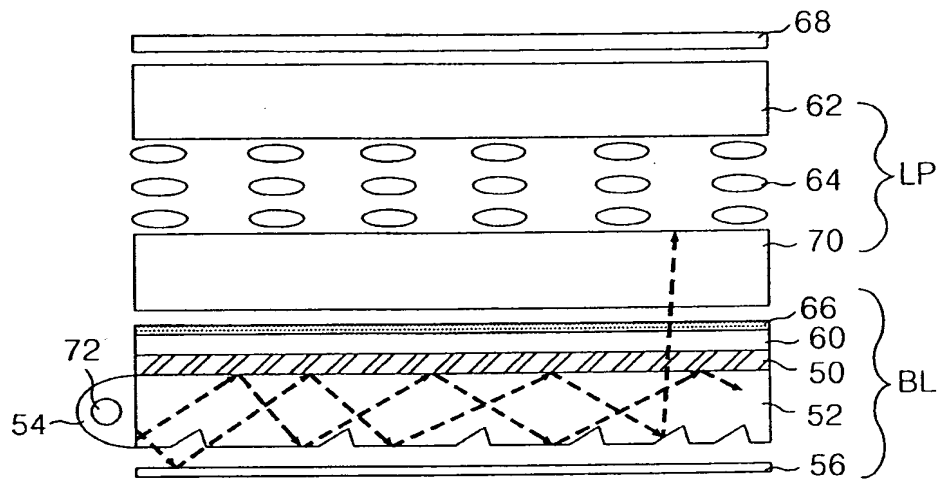


FIG. 5

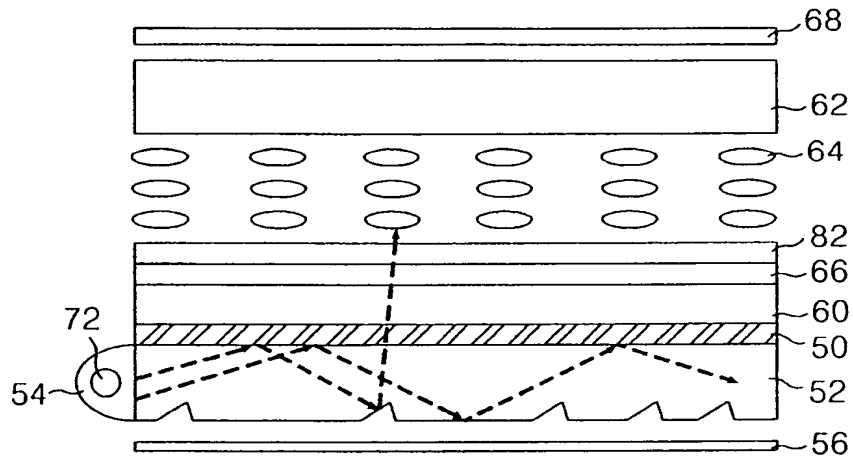


FIG. 6



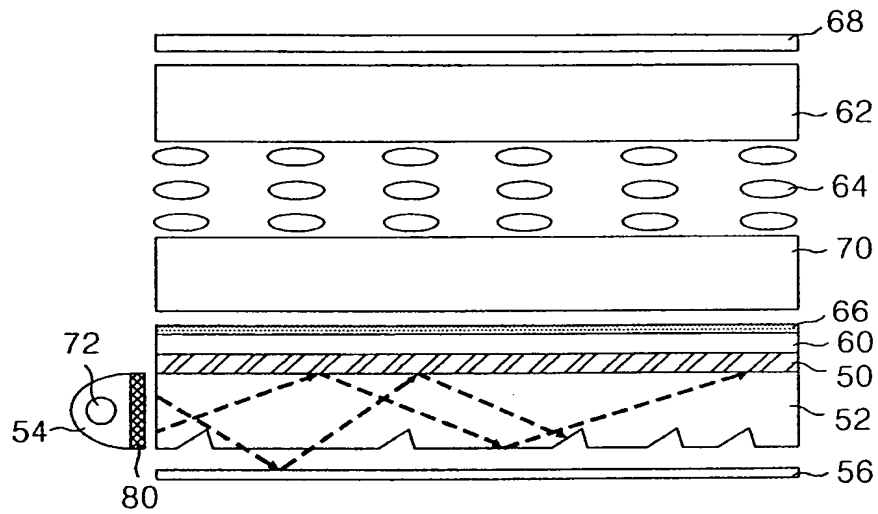


FIG. 7

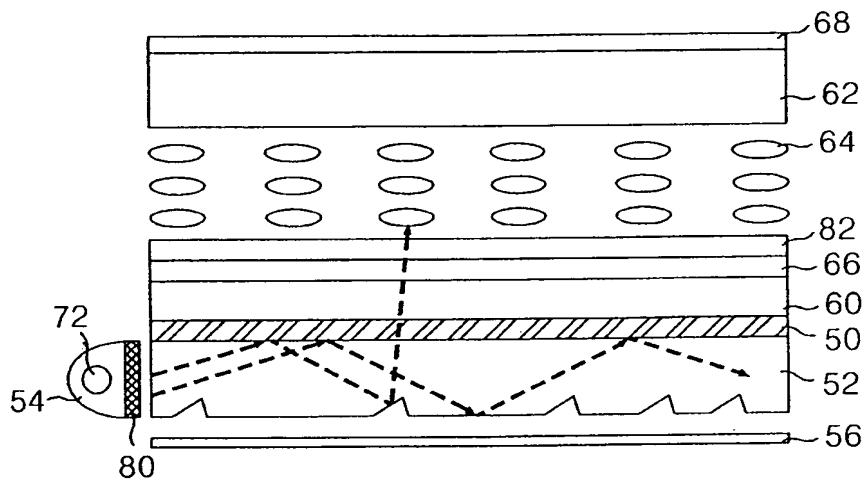



Our File No. 10125/4134
LGP Ref. No. F03-427US001

PATENTS ONLY

TO THE COMMISSIONER FOR PATENTS

Please record the attached original document or copy thereof.


1. Name of Party conveying an interest: Hyung Ki HONG Additional name(s) of conveying party(ies) attached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	2. Name and Address of Party receiving an interest: Name: LG. PHILIPS LCD CO., LTD. Internal Address: Street Address: 20, Yoido-dong, Youngdungpogu City: Seoul State/Zip: Republic of Korea Additional name(s) and addresses attached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
---	---

3. Description of the interest conveyed:
☒ Assignment ☐ Change of Name Other:
☐ Security Agreement ☐ Merger

Execution Date: December 24, 2003
Application number(s) or patent number(s). Additional sheet attached? ☐ Yes ☒ No


If this document is being filed together with a new application, the execution date of the application is:
December 24, 2003
Date
Patent Application No.(s) Patent No.(s)

Additional numbers attached? ☐ Yes ☒ No

5. Name and address of party to whom correspondence concerning document should be mailed: BRINKS HOFER GILSON & LIONE P.O. BOX 10395 CHICAGO, IL 60610 (312)321-4200  00757 PATENT TRADEMARK OFFICE	6. Number of applications and patents involved: <u>1</u> 7. Total fee (37 CFR 3.41) \$ <u>40</u> <input checked="" type="checkbox"/> Enclosed <input type="checkbox"/> Authorized to be charged to Deposit Account No. 23-1925 8. <input checked="" type="checkbox"/> Please charge any deficiencies in fee or credit any overpayment to Deposit Account No. 23-1925.
---	---

DO NOT USE THIS SPACE

Statement and signature.
To the best of my knowledge and belief, the foregoing information is true and correct and any attached copy is a true copy of the original document.

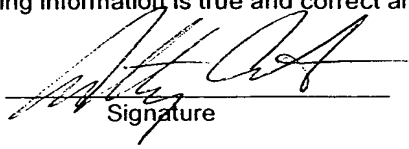Anthony P. Curtis, Ph.D., Reg. No. 46,193 Name of Person Signing	 Signature	<u>December 29, 2003</u> Date
---	---	----------------------------------

Total number of pages including cover sheet, attachments, and document: 3

ASSIGNMENT

WHEREAS, Hyung Ki HONG, hereinafter called the "Assignor", has made the invention described in the United States patent application entitled LIQUID CRYSTAL DISPLAY MODULE, executed by Assignor on the same date as this Assignment;

WHEREAS, LG. PHILIPS LCD CO., LTD. a corporation organized and existing under the laws of Korea, having a place of business at 20, Yoido-dong, Youngdungpo-gu, Seoul, Republic of Korea, hereinafter called the "Assignee," desires to acquire the entire right, title and interest in and to the invention and the patent application identified above, and all patents which may be obtained for said invention, as set forth below;

NOW, THEREFORE, in exchange for valuable and legally sufficient consideration, the receipt of which by the Assignor from the Assignee is hereby acknowledged, the Assignor has sold, assigned and transferred, and by these presents does sell, assign and transfer to the Assignee, the entire right, title and interest for the United States, its territories and possessions, in and to the invention and the patent application identified above, and any patents that may issue for said invention in the United States; together with the entire right, title and interest in and to said invention and all patent applications and patents therefor in all countries foreign to the United States, including the full right to claim for any such application all benefits and priority rights under any applicable convention; together with the entire right, title and interest in and to all continuations, continuations-in-part, divisions, renewals, extensions or reissues of any of the patent applications and patents defined above; to have and to hold for the sole and exclusive use and benefit of the Assignee, its successors and assigns, to the full end of the term or terms for all such patents.

The Assignor hereby covenants and agrees, for both the Assignor and the Assignor's legal representatives, that the Assignor will assist the Assignee in the prosecution of the patent application identified above; in the making and prosecution of any other patent applications that the Assignee may elect to make covering the invention identified above; in vesting in the Assignee like exclusive title in and to all such other patent applications and patents; and in the prosecution of any interference which

may arise involving said invention, or any such patent application or patent; and that the Assignor will execute and deliver to the Assignee any and all additional papers which may be requested by the Assignee to carry out the terms of this Assignment.

The Commissioner of Patents and Trademarks is hereby authorized and requested to issue patents to the Assignee in accordance with the terms of this Assignment.

IN TESTIMONY WHEREOF, the Assignor has executed this agreement.

DATE Dec 24, 2003

Hyung Ki Hong
Hyung Ki HONG

WITNESSED

DATE _____

DATE _____

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney for Patent Application

특허 출원 관련 선언 및 위임권

Korean Language Declaration

Our Case No. 10125/4134
LGP No. F03-427US001

아래 지명된 발명자로서, 본인은 하기 사항을 선언합니다.

본인의 거주지, 우송 주소 및 국적은 본인의 성명 아래에 기재된 것과 동일합니다.

본인은 하기 명시된 발명에 대한 특허를 청구하는 주체의 최초 원래 단독 발명자이거나 (아래에 한 이름만이 기재된 경우) 또는 최초 원래 공동 발명자임을 (아래에 여러 이름이 기재된 경우) 확인합니다.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LIQUID CRYSTAL DISPLAY MODULE

다음 난이 체크되어 있지 않으면 본 발명의 명세서가 여기에 첨부됩니다.

☐ 미합중국 출원번호 또는 PCT 국제 출원번호는 _____로
_____일에 출원되었고
_____일에 개정되었음
(해당 경우).

본인은 상기 기재에 의거 수정된 상기 명세서는 물론 특허 청구의 내용을 심사했으며 이해했음을 확인합니다.

본인은 연방 규정 코드인 제37 장의 제1.56항에 의거하여 특허 자격에 관한 자료 정보를 공개할 의무를 인정합니다.

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____
as United States Application Number or PCT
International Application Number
_____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

This collection of information is required by 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 24 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Korean Language Declaration

본원은 외국인 특허 출원(들)이나 발명자의 증명서 관련 경우에는 미합중국 코드인 제35장의 제17.9(a)-(d)항이나 제365(b)항에 의거하여 또는 미합중국 이외에 적어도 한 국가를 지정하는 PCT 국제 출원의 경우에는 제365(a)항에 의거하여 하기 명시된 특허 출원의 외국 우선권을 주장하며, 외국인 특허 출원, 발명자 증명서 또는 우선권이 주장되는 출원일 이전에 제출된 PCT 국제 출원도 또한 여기에 해당함을 체크함으로써 확인하였습니다.

P 2002-15679

(Number)
(번호)

Korea

(Country)
(국가)(Number)
(번호)(Country)
(국가)

본원은 미합중국 코드인 제35장 제119항(c)에 명시된 바와 같이 하기 미합중국 가출원에 관련된 특권을 요구합니다.

(Application No.)
(출원 번호)(Filing Date)
(출원일자)(Application No.)
(출원 번호)(Filing Date)
(출원일자)

본원은 미합중국 코드인 제35장의 미국인 출원(들) 관련 제120항에 명시된 바와 같이 또는 미합중국을 지정하는 PCT 국제 출원 관련 제365(c)항에 명시된 바와 같이 하기 출원의 특권을 요구합니다. 이 출원서에 있는 각 특허 청구의 내용이 미합중국 코드인 제35장 제112항의 첫번째 절에서 명시된 바와 같이 종전의 미국 또는 PCT 국제 출원에 발표되지 않았으면 본원은 연방 규정 코드인 제37장 제1.56항에 명시된 바와 같이 종전 출원일자와 이 출원서의 국내 또는 PCT 국제 출원일자 사이에 특허 자격에 대한 자료 정보를 공개할 의무를 인정합니다.

(Application No.)
(출원 번호)(Filing Date)
(출원일자)(Application No.)
(출원 번호)(Filing Date)
(출원일자)

본원이 여는 한도 내에서 여기에 제공된 모든 내용이 사실이고, 제공된 정보나 소신이 모두 사실임을 확인하며, 더 나아가 미합중국 코드 제18장의 제1001절에 명시된 바와 같이 그외의 허위 진술 및 이와 유사한 행위는 법규이나 투옥으로 처벌 받거나 법규와 감옥형을 모두 받을 수 있고 이러한 그외의 허위 진술은 특허 출원이나 후에 발급된 특허의 유효성을 위태롭게 함을 인지하면서 여기에 진술함을 선언합니다.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
우선권 주장 없음

13/March/2003

(Day/Month/Year Filed)
(출원일자 일/월/년)☐(Day/Month/Year Filed)
(출원일자 일/월/년)☐

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status) (patented, pending, abandoned)
(현황) (특허 획득, 출원중, 포기)(Status) (patented, pending, abandoned)
(현황) (특허 획득, 출원중, 포기)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application of any patent issued thereon.

Korean Language Declaration

관: 지명된 발명자로서 본인은 이 특허를 출원하고 이와 관련하여
몇 삼보청이 요구하는 사무를 처리하기 위해서 하기 변호사(들)
는 대리인(들)을 임명합니다. (성명 및 등록번호 기입)

POWER OF ATTORNEY: As a named inventor, I hereby
appoint the following attorney(s) and/or agent(s) to prosecute
this application and transact all business in the Patent and
Trademark Office connected therewith: (list name and
registration number) See Attachment "A"

서신 수신자

Brinks Hofer Gilson & Lione

Send Correspondence to:

Post Office Box 10395
Chicago, Illinois 60610

직통 전화 수신자 (성명 및 전화번호)

Direct Telephone Calls to: (name and telephone number)

Gustavo Siller, Jr., Reg. No. 32,305
312/321-4249


단독 또는 첫번째 발명자의 성명	Full name of sole or first inventor	HONG, Hyung Ki
발명자의 서명	인자	Inventor's signature Hong, Hyung Ki Date Dec 24, 2003
거주지	Residence	Republic of Korea
국적	Citizenship	Korean
우송 주소	Post Office Address	#108-1502, Kuekdong Apartment, Hyunjeo-dong, Seodaemun-ku, Seoul, Korea
만약 있으면 두번째 공동 발명자의 이름	Full name of second joint inventor, if any	
두번째 발명자의 서명	인자	Second inventor's signature Date
거주지	Residence	Republic of Korea
국적	Citizenship	Korean
우송 주소	Post Office Address	

(세번째 그리고 차후의 공동 발명자들에 대한 유사한 정보와
그들의 서명을 제공할 것.)

(Supply information and signature for third and subsequent joint
inventors.)

ATTACHMENT A

Guy W. Shoup	26,805
Gustavo Siller, Jr.	32,305
Jasper W. Dockrey	33,868
John C. Freeman	34,483
William F. Prendergast	34,699
Michael E. Milz	34,880
John F. Nethery	42,928
James A. Collins	43,557
Anthony P. Curtis	46,193
Kader Gacem	52,474
Sid Bennett	53,981



EV 327173250 US



UNITED STATES POSTAL SERVICE®

Customer Copy
Label 11-F June 2002

Post Office To Addressee

ORIGIN (POSTAL USE ONLY)			
PO ZIP Code 110607	Day of Delivery <input type="checkbox"/> Next <input checked="" type="checkbox"/> Second	Flat Rate Envelope <input type="checkbox"/>	
Date In 12-29-03	<input checked="" type="checkbox"/> 12 Noon <input type="checkbox"/> 3 PM	Postage \$ 1.85	
Time In 5:14	Military <input type="checkbox"/> 2nd Day <input type="checkbox"/> 3rd Day	Return Receipt Fee \$	
<input type="checkbox"/> AM <input checked="" type="checkbox"/> PM	Int'l Alpha Country Code	COD Fee	Insurance Fee
Weight 3.5 lbs.	Acceptance Clerk Initials [Signature]	Total Postage & Fees \$ 1.85	
No Delivery <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday			


DELIVERY (POSTAL USE ONLY)		
Delivery Attempt	Time	Employee Signature
Mo. Day	<input type="checkbox"/> AM <input type="checkbox"/> PM	
Delivery Attempt	Time	Employee Signature
Mo. Day	<input type="checkbox"/> AM <input type="checkbox"/> PM	
Delivery Date	Time	Employee Signature
Mo. Day	<input type="checkbox"/> AM <input type="checkbox"/> PM	
<input type="checkbox"/> WAIVER OF SIGNATURE (Domestic Only) Additional merchandise insurance is void if waiver of signature is requested. If not, delivery is made without obtaining signature of addressee or addressee's agent (if delivery employee judges that article can be left in secure location) and I authorize that delivery employee's signature constitutes valid proof of delivery.		
NO DELIVERY <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday		
Customer Signature		

CUSTOMER USE ONLY	
METHOD OF PAYMENT: Express Mail Corporate Acct. No.	
FROM: (PLEASE PRINT) BRINKS, HOFER GILSON & LIGNE PO BOX 10087 CHICAGO IL 60610-0087	PHONE 312,321 4200
10125/4134 APC/cb	

Federal Agency Acct. No. or Postal Service Acct. No.
TO: (PLEASE PRINT) MAIL STOP PATENT APPLICATION COMMISSIONER FOR PATENTS PO BOX 1450 ALEXANDRIA VA 22313-1450
PHONE ()

PRESS HARD.
You are making 3 copies. FOR PICKUP OR TRACKING CALL 1-800-222-1811 www.usps.com






EXP MAIL LABEL E/ 327173250 US
Serial No. NEW PATENT APPLICATION
Case No. 10125/4134 (F03-427 US001)
Applicant: Hyung Ki Hong

MAIL STOP Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313

Please acknowledge receipt of the below-identified: Checks in the amount of \$878 and \$40;
Patent Application Transmittal Letter (1p. Filed in Dup.); Patent Application (30pp.
of Specification including cover page and 7 sheets of Drawings); Assignment
Recordation Form Cover Sheet (1p.); Executed Assignment (2pp.); Combined
Declaration/Power of Attorney (4pp.); and PTO Reply Postcard

BRINKS HOFER GILSON & LIONE Anthony P. Curtis, Ph.D., Reg. No. 46,193
Dated: December 29, 2003



I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage, as first class mail in an envelope addressed to:

Mail Stop MISSING PARTS
Commissioner for Patents,
P.O. Box 1450
Alexandria, VA 22313-1450, on

12/1/04

(Date of Deposit)

Anthony P. Curtis, Ph.D., Reg. No. 46,193

Name of Applicant, Assignee or
Registered Representative

Signature

Our File No. 12581-4134

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Hyung Ki Hong

Serial No.: 10/750,575

Examiner: Not yet assigned

Filed: December 29, 2003

Group Art Unit No. 2871

For: LIQUID CRYSTAL DISPLAY
DEVICE

DECLARATION OF ANTHONY P. CURTIS, Ph.D.

Mail Stop MISSING PARTS
Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

The undersigned hereby states as follows:

1. The above-identified application was filed in the United States Patent and Trademark Office by the law firm of Brinks Hofer Gilson and Lione on December 29, 2003.
2. I have personal knowledge of the events herein. I was the attorney in charge of filing the application. I reviewed the application before filing and found


there to be 30 pages (including the title page). Page 9 was present in the application at the time the application was filed.

3. Attached hereto as Exhibits 1-4 in support of this declaration are a copy of the application, express mail receipt, a copy of the PTO Stamped Postcard confirming receipt of 30 pages (including title page) of the application, and the instant affidavit.

4. This declaration, accompanying petition and supporting materials are being timely filed (within 2 months) in response to the Notice of Omitted Item(s) in a Nonprovisional Application dated October 15, 2004.

5. I declare under penalty of perjury that the foregoing is true and correct to the best of my knowledge and belief.

Date: 12/1/04

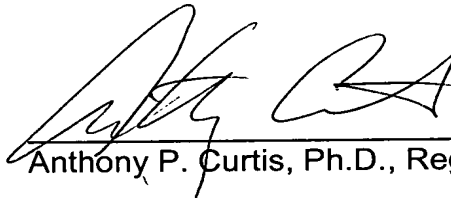
Anthony P. Curtis, Ph.D., Reg. No. 46,193